



Rendered Flax

Collection	Large and Local
Style Name	Rendered Flax
Style Number	C0192
Product Type	LVT
Size	6 in X 48 in

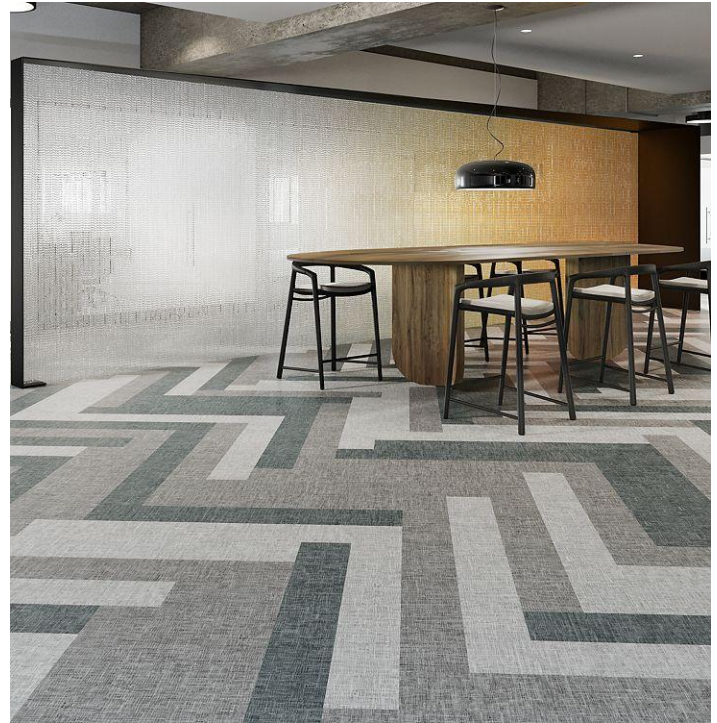


Feature	Description
Overall Thickness	4.5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force™ Ultra
Surface Profile	Overall Emboss
Edge Profile	Micro-beveled Edge
Squareness	(ASTM F2421) Passes
Square Foot per Carton	20
Pounds per Carton	34.1
Classification	ASTM F1700 - Class III, Type B - Embossed
Size and Tolerance	(ASTM F2055) Passes
Recommended Adhesive	M95.0, M99, M700 Plus, or Total Bond Adhesive
Type of Construction	Commercial Grade Luxury Vinyl Tile
Installation Method (Click or Glue)	Glue Down


Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Brick Ashlar



Brick Ashlar



Herringbone

Colorways



Boreal

Color code: 95
Style number: C0192



Crisp

Color code: 127
Style number: C0192



Beach Grass

Color code: 128
Style number: C0192



Hemlock

Color code: 415
Style number: C0192



Dusk

Color code: 655
Style number: C0192



Wild Indigo

Color code: 698
Style number: C0192



Buckthorn

Color code: 812
Style number: C0192



Madder Root

Color code: 847
Style number: C0192



Walnut Husk

Color code: 848
Style number: C0192



Ice

Color code: 918
Style number: C0192



Snowbank

Color code: 919
Style number: C0192



Intrepid

Color code: 928
Style number: C0192



Mountain Ash

Color code: 938
Style number: C0192



Mist

Color code: 961
Style number: C0192



Coir Gray

Color code: 992
Style number: C0192

Performance

Feature	Description
Static Load	(ASTM F970) 1000 psi
Dimensional Stability	(ASTM F2199) Passes
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes -ΔE <8
Resistance to Light	ASTM F1515 - Passes -ΔE <8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	(ASTM E-662) Δ 450
Flexibility	(ASTMF137) Passes
Overall Thickness	(ASTM F386) Passes

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Country of Origin	USA
Environmental Product Declaration	Flex 4.5 LVT EPD (Made in the USA)
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.031 kg CO2e/ft2
Embodied Carbon	0.62 kg CO2e/ft2

Warranties

Limited 20-Year M-Force Ultra Commercial Warranty