



CONCRETE  
+ COMPOSED

COVER | **CONCRETE** 094UV in forged concrete 03507  
18.5 x 24 in | 47x 61 cm | installed stagger



**CONCRETE** 094UV in misty quartz 03501  
18 x 24 in | 47x 61 cm | installed stagger

### poised for performance


Defined by strength and tempered by texture, Concrete & Composed is constructed with innovative COREtec® XRC technology. The dimensionally stable construction and high density core is ideal for high traffic commercial environments with low maintenance and quick installation. Rich wood grain visuals and textured concrete provides a foundation of beauty and performance.



**COMPOSED** 098UV in grand teton 00506  
7 x 48 in | 17.8 x 121.9 cm | installed stagger

# COREtec® WITH XRC

COREtec® XRC delivers high performance and durability in heavy commercial environments. With a patented layered construction, COREtec® XRC is dimensionally stable, waterproof, scratch resistant and reduces sound transmission. Designed with locking edges, installation is quick and easy, reducing installation time and labor costs.

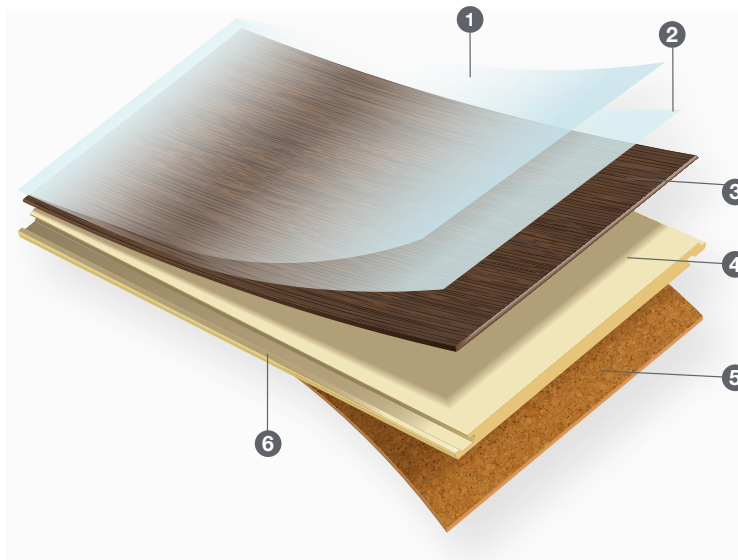

1. ExoGuard™ finish layer adds resistance to scratching, staining and abrasion.
2. Commercial wear layer protects against premature product aging.
3. Print film layer is printed in high resolution and is laminated directly to the COREtec® XRC core.
4. COREtec® XRC extruded core is waterproof and dimensionally stable. With a density of 1900-2000kg/m<sup>3</sup>, the rigid core protects the top layers from indentation.
5. Attached Cork Underlayment provides added sound dampening from foot traffic and floor to floor sound transfer.
6. Integrated locking edges eliminates the need for wet adhesives. Floating installation limits floor prep and eliminates telegraphing.

**WATERPROOF**  
COREtec® XRC is 100% waterproof and can be installed in areas with topical moisture like bathrooms and kitchens.


**SCRATCH RESISTANT**  
ExoGuard™ finish combined with low gloss and proper embossing provides excellent stain, scratching and abrasion resistance.

**REDUCES SOUND TRANSMISSION**  
COREtec® features an attached cork underlayment that softens in room footfall and floor to floor sound transfer.

**FASTER INSTALLATION**  
Installs 12X faster than comparable products - Install right out of the box with no acclimation time with little or no floor prep required.

**REDUCES COST**  
Floating installation allows installation over existing hard surfaces with little or no floor prep. It will not telegraph and will hide many sub floor imperfections.

**NO EXPANSION JOINTS**  
Superior dimensional stability that will not expand or contract in hot or cold conditions, eliminating the need for expansion joint covers.



## Installation

Products	Concrete 094UV	Composed 098UV
<b>Pattern Repeat*</b>	Repeat Width - 59.06 inches   1.5 meter Repeat Length - 39.37 inches   1 meter <small>*tile size is not divisible into pattern repeat length resulting in a wide variety of unique tiles after the cutting process</small>	Repeat Width - 39.37 inches   1 meter Repeat Length - 39.37 inches   1 meter <small>*tile size is not divisible into pattern repeat length resulting in a wide variety of unique tiles after the cutting process</small>
<b>Packaging</b>	10 Tiles/Carton   400 Tiles/Pallet	12 Tiles/Carton   480 Tiles/Pallet
<b>Tile size:</b>	3.08 ft <sup>2</sup>   0.29 m <sup>2</sup>	2.39 ft <sup>2</sup>   0.22 m <sup>2</sup>
<b>Carton size:</b>	30.86 ft <sup>2</sup>   2.87 m <sup>2</sup>	28.68 ft <sup>2</sup>   2.66 m <sup>2</sup>
<b>Pallet size:</b>	1234.40 ft <sup>2</sup>   114.68 m <sup>2</sup>	1147.20 ft <sup>2</sup>   106.58 m <sup>2</sup>
<b>Warranty</b>	Lifetime Structure, Lifetime Waterproof, Lifetime Pet, 15 year heavy commercial	
<b>Installation</b>	Floating or direct glue	
<b>Installation Patterns</b>	 ashlar      stagger	




## Sustainability Attributes

We believe that even one small thing can have a big impact. We actively work to evaluate each component of our products to ensure the health and safety of this generation and of generations to come.



**Materials & Resources**  
IEQ - Floorscore®  
IAQ Certification



**Ortho-Phthalate Free**  
Manufactured to be truly free of ortho-phthalates



Certified for low VOCs



## Resources

### Design. Deliver. Delight.


Shawcontract.com offers a full range of product and design resources. For complete specifications, maintenance guidelines and warranty information for Concrete & Composed, visit the product page. Download photography, save your favorites and order samples.

### Imagine. Explore. Create.

Get inspired using our award winning **compose design tool**. Customize flooring layouts to your specifications. Installation methods and color visualization are at your fingertips.

## RECOMMENDED APPLICATIONS

**Ideal for Commercial Environments**  
Corporate | Retail | Hospitality | Senior Living

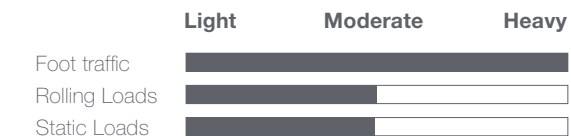


\*Based on tested ceiling assembly. For more information, contact your account manager.




## COLOR AND VISUAL VARIATION INDEX


Shade and texture variation is inherent in these products. It can vary slightly or significantly from piece to piece within a color. V1 shade variation has little or no variation from piece to piece. V4 will have a large variation in color and/or visual.




**V1** UNIFORM APPEARANCE



**V2** SLIGHT VARIATION



**V3** MODERATE VARIATION



**V4** SUBSTANTIAL VARIATION

### CONCRETE 094UV



**V2** misty quartz 03501



**V3** tempered concrete 03502










**V3** rugged platinum 03503



**V2** forged concrete 03507

### COMPOSED 098UV

Images represent shade variation only. Samples should be used for color.

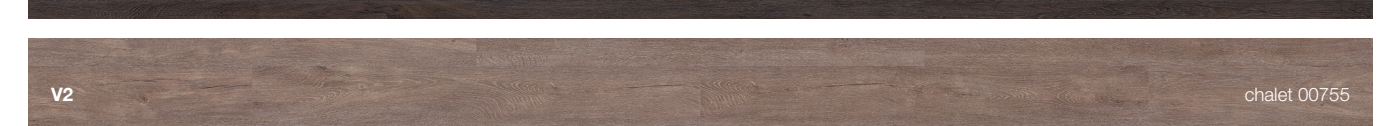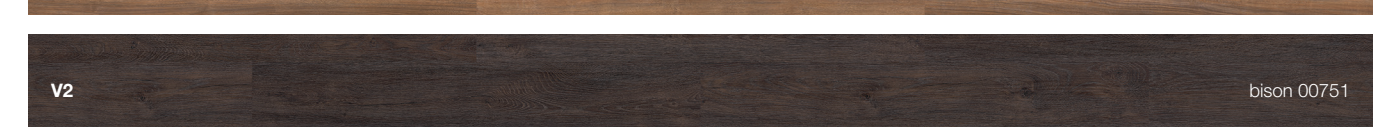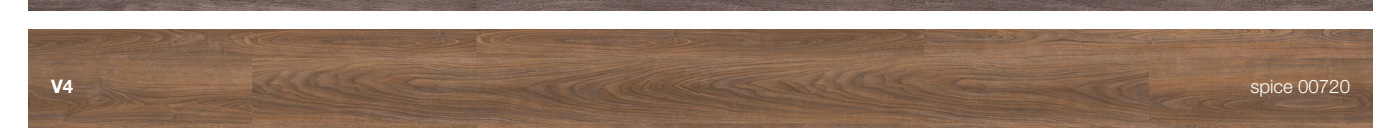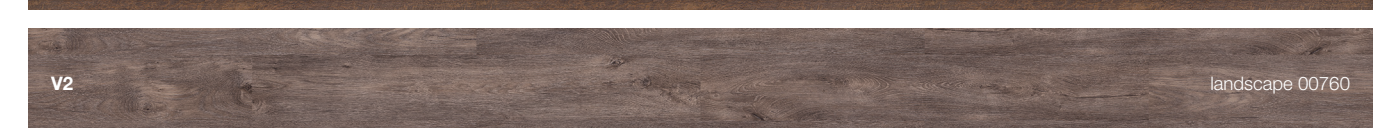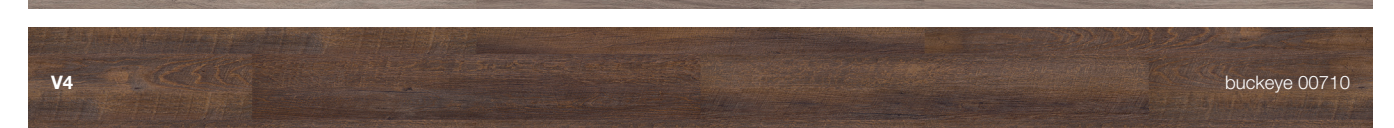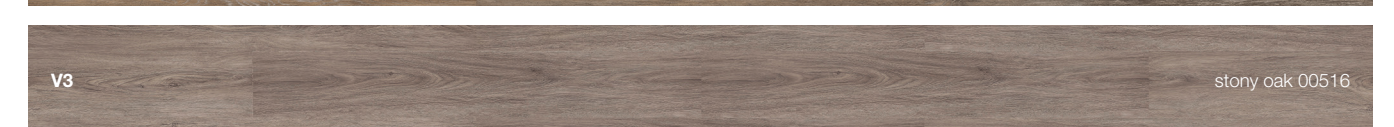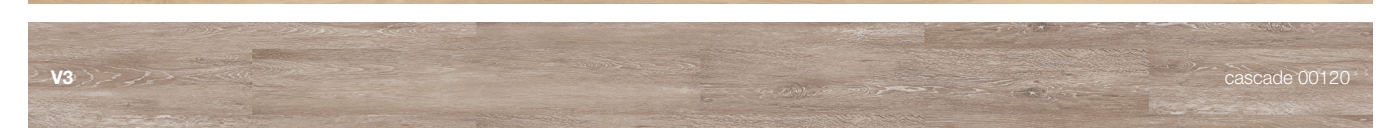

**PASTE DOWN PAGE  
INTENTIONALLY LEFT BLANK**